

## ...truffles enrobing by Magic Carpet



- the air flow device (necessary for the truffles enrobing) can be positioned by using some simple hooks
- equipped with Reverse switch to reverse the direction of the net for the truffles enrobing




Have a look at the video about the truffles enrobing!



## VIBRATING TABLE EVO



- heated inclined lateral sides which create a more efficient chocolate dripping, its return into the tank thus eliminating waste
- wide vibrating counter tops with removable pierced rubber for positioning the mould for a noiseless machine



- heated central nut for intrusion detection



Have a look at the video about the Vibrating table EVO!



K24  
EVO

All technological Bravo's experience, gained over the years, devoted to the chocolate business!

## Programs

- Free
- 10 programs to be customizable
- Stracciatella
- Chocolate pistolet
- Cocoa Butter
- Drying



K24  
EVO


is a **BRVO** product

**HEADQUARTER**  
**Bravo S.p.A.**  
Montecchio Maggiore  
Vicenza, Italy  
Ph.: +39 0444 707A700  
Email : info@bravo.it  
www.bravo.it

**Bravo North America Inc.**  
810 Tyvola Road, Suite 130, Charlotte, NC 28217  
Office: (+1) 980 237 2474  
Email: info@bravonorthamerica.com  
www.bravonorthamerica.com

## Technical features

Max tank capacity [kg]	24
Suggested min quantity [kg]	8
Suggested max quantity [kg]	20
Magic Carpet coating belt width [cm]	25
Max power [kW]	2.85
Power consumption [kWh]	1.1
Voltage / phase / Frequency	230 / 60 / 3
Absorption [A]	7.5
Power socket [A]	16
Freon	R404A
Cooling system	air
K24 Weight [kg]	135
Magic Carpet weight [kg]	60
Vibrating table weight [kg]	12,5

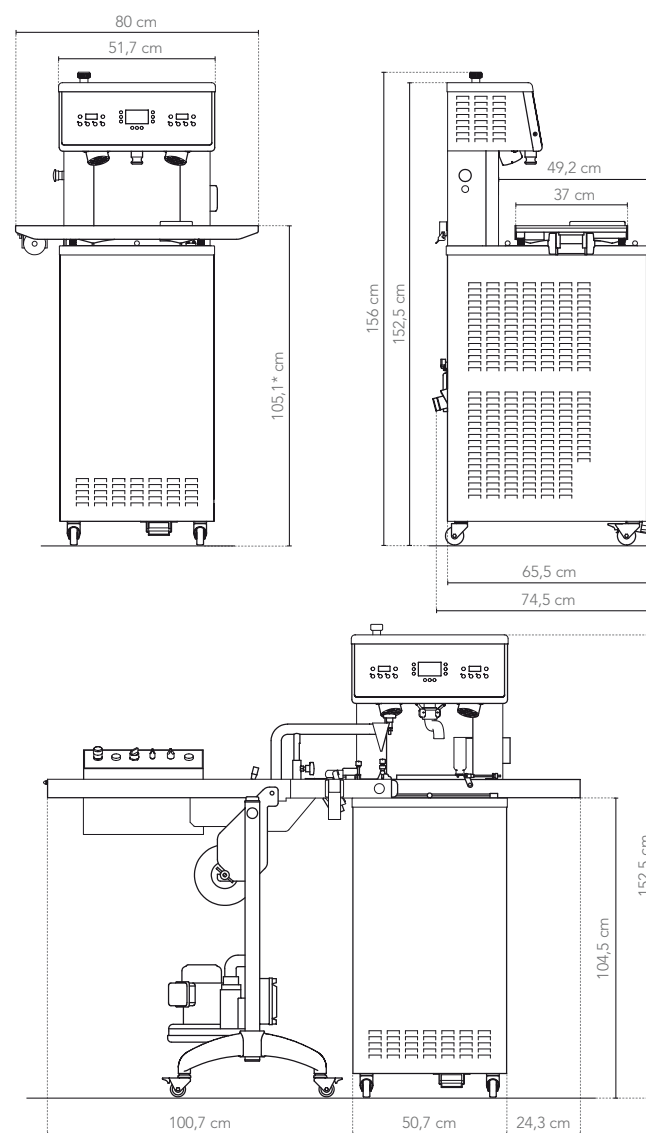

Rev. 06/13 Data can be changed at any time without notice by the manufacturer.

K24 EVO, the new



technological challenge





## THE CHOCOLATE EVOLUTION



Have a look  
at the video of  
K24 EVO!



K24  
EVO

## K24 EVO

### Thermic self-balancing

Automatic control system to operate the temperature in accordance with the quantity of product inside the machine.

### Sheet resistance heating system

The patented sheet resistance heating system allows for precise chocolate temperature control avoiding an unpleasant exit from the tempering.

### Display & Keyboard

The display is easy to read, featuring simple and intuitive digital commands including advice on the video of the operations to execute.

### Cocoa Butter Program

This program allows to easily change the type/colour of chocolate avoiding any difficult manual operations.



### Delayed start

It is possible to program start after a preset period to have melted or temper chocolate when you need it.

### Switching off

The machine doesn't stop immediately at the signal but detects automatically the exit from the tempering before the interruption of the operation. The restart of the service is thus facilitated.

### Auger screw

The auger screw is made in stainless steel which helps to prevent wear over time and its movement can be reversed to facilitate the cleaning.



### Anti-congealing lamps

The anti-congealing lamps heat the grid to avoid the congealing of the chocolate placed upon the grid.



### Temperature control

Due to the viscosity in chocolate, it is very difficult to monitor changes in the temperature. In the K24 EVO an algorithm controls the new generation probes that detect the temperature within a tenth of degree accuracy and keeps steady temperature at the heart of the chocolate.



### Program storage

The machine stores the pre-set temperatures for each program according to the user's choice. The operating parameters are then stored and should not be set for each production.

### Flat Table

- the vibration eliminates air which allows the chocolate to be packed into the moulds
- easily removable for cleaning



### Further advantages

- programmable volumetric pedal dispenser
- rapid emptying of the tank for cleaning
- back pipe for chocolate outflow
- handy side electric outlet suitable to be connected to any plug

## K24 EVO accessories

### MAGIC CARPET: Coating Belt for Partial or Total Covering


Have a look  
at the video of  
Magic Carpet!



3 zones band to totally or partially enrobe the products. It can be used in its full width (250 mm) and its speed can be adjusted by a speed variator. The output zone (equipped with cutting tails) as well is adjustable in speed and height to avoid waste. The coating area has an adjustable vibration system for dripping the chocolate

equipped with anti-congealing lamps for the chocolate that flows back in the tank

it is possible to stop the loading area of the trolley for precise positioning of the product



equipped with release system for cleaning of the part that is dirty of chocolate

air flow, for removing the chocolate in excess, with adjustable nozzle



partial enrobing device available in 2 versions, single shower or double shower for an impeccable partial enrobing

the «Easy Cut System» allows for a quick and easy paper cut avoiding any slowdown in the couverture cycle or damage to the coating belt

equipped with a special device to perfectly tighten the paper



equipped with a special device to adjust the alignment of the conveyor belt to the machine to be perfectly straight

clutch to avoid the break of the conveyor belt during the turn on


Do-it-yourself replacing of the metallic net possible thanks to the patented quick system



equipped with stainless steel tap easy to be adjusted to supply the arc diffuser to do the total enrobing



equipped with accessory for a uniform stracciatella enrobing



Have a look at the video  
of the Magic Carpet  
accessories!

Magic Carpet is the **ONLY** conveyor belt for the truffles enrobing (by direction reversion): discover it on the following page ...

