

# Ice Cooled Drop In Dispenser


The ICD 2300 is designed using the highest quality materials and proven technology providing our customers with consistent drink quality.

# 2300 Ice Cooled Drop In Dispenser

- > Available with six or eight valves
- > Stainless steel construction with sealed-in cold plate
- > 3/4" drain with strainer to prevent ice blockage
- > Stainless steel flooded soda manifold and multiple plain water configuration
- Ice bin insulated with HFC free structural foam
- > Tower designed with removable splash plate and drip tray for easy cleaning
- > Dispenser can accommodate any number of non-carbonated drinks
- > Sliding bin lid with electric valve lock out
- Optional top merchandiser and back marquee feature lighted graphics for maximum impact
- Optional splash guards
- > Dispensing Solutions that Pour More





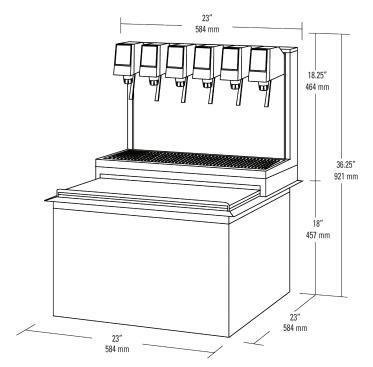

# **OPTIONS**









Marquee


Merchandiser

Splash Guards

Power Supply

# **CONVERSION STAND - 23" X 23"**

- > All stainless steel construction
- > Front access panel
- > 6" (152 mm) adjustable legs
- Allows quick and easy conversion from drop in to free standing unit
- > Shipping Weight: 80 lbs (36.28 kg)



#### Customer Service:

Should you require more information about our products, please do not hesitate to contact our customer service desk at **custserv@lancercorp.com.** 

# Warranty:

For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.

**Lancer Corp.** 6655 Lancer Boulevard · San Antonio, TX 78219 210-310-7000 · 1-800-729-1500 · Fax: 210-310-7250









# **ICD 2300**

# **SPECIFICATIONS**

# **DIMENSIONS**

Height: 36.25" (921 mm) Width: 23" (584 mm) Depth: 23" (584 mm)

# **COUNTER CUT-OUT**

Width: 23.25" (591 mm) Depth: 23.25" (591 mm)

# **ELECTRICAL**

115V/60Hz

# WEIGHT

Operating: 206 lbs (93 kg) Shipping: 130 lbs (59 kg)

#### ICE

Capacity: 100 lbs (45 kg)

#### **FITTINGS**

Soda Inlets: 3/8" male barb Syrup Inlets: 3/8" male barb

#### **VALVES**

LEV® and other valves available upon request

# **FLEX MANIFOLD CONFIGURATION**

6-valve 3-1-2, 5-1 8-valve 3-1-1-3

# **KEY LOCK SWITCH**

#### **DRAW PERFORMANCE**

Number of Drinks Below 40°F

# 75°F (24°C) Ambient Temperature

12 oz/10 drinks per minute 24 oz/7 drinks per minute

# 90°F (32°C) Ambient Temperature

12 oz/8 drinks per minute 24 oz/5 drinks per minute

(Units can supply drinks under 40°F at rated draw performance continuously as long as ice is kept on cold plate.)



lancercorp.com